


Shocker P2

Enjoy the emotion of color and the power of a blinder with Shocker P2. This dual lens, dual zone blinder can lead/follow up to 4 fixtures together to create eye-catching synchronized shows. It has 2 penta-color LEDs (RGBA+WW) to suit almost any application. DMX compatibility means complete control flexibility. Electrify nightlife with this punchy strobe light fixture.

HIGHLIGHTS

- Colorful dual zone blinder with a gamut of colors to suit most applications
- D-Fi USB compatibility for wireless master/slave or DMX control
- Link up to 4 slave fixtures to create eye-catching synchronized shows
- Easy navigation and access to all functions directly from the OLED display
- Achieve smooth LED fading with built-in dimming curves
- powerCON®-compatible power input/output connections for power linking
- Flexible control options with onboard 3- and 5-pin DMX connectors

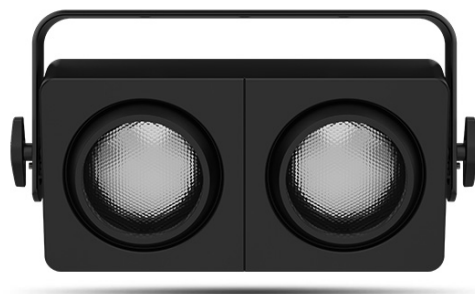

SPECIFICATIONS

- DMX Channels : 4, 7, 12 or 20
- DMX Connectors : 3- and 5-pin XLR
- Light Source : 2 LEDs (penta-color RGBA+WW) 130 W, (2.8A), 50,000 hours life expectancy
- Strobe Rate : 0 to 20 Hz
- Beam Angle : 62°
- Field Angle : 105°
- Illuminance : 1,300 lux @ 2 m
- Power Linking : 12 units @ 120 V; 22 units @ 230 V
- Input Voltage : 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight : 8.2 lb (3.7 kg)
- Size : 16.6 x 3.8 x 9.1 in (422 x 98 x 232 mm)
- Approvals : CE, MET, ROHS
- Power and Current : 120 W, 1 A @ 120 V, 60 Hz
- Power and Current : 118 W, 0.5 A @ 230 V, 50 Hz
- Bracket Mounting Hole : M13
- Optional Controllers : DMX, RDM

WHAT'S INCLUDED

- Shocker P2
- Power cord
- PowerCON to bare end (EU only)
- QRG