

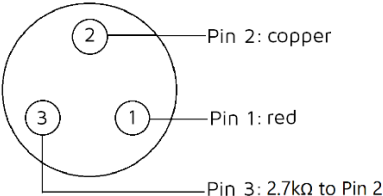

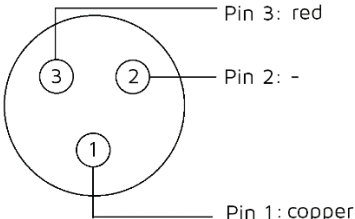
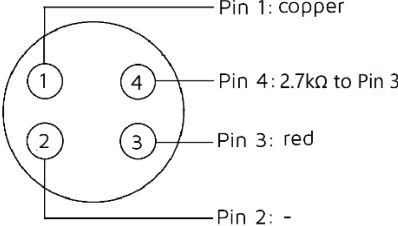
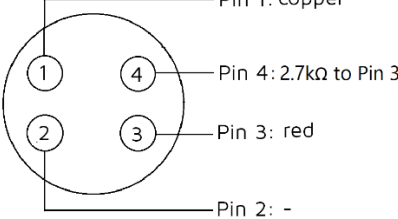


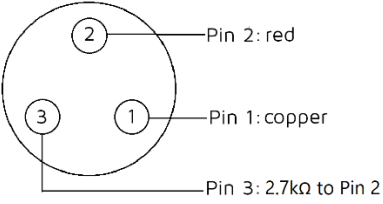
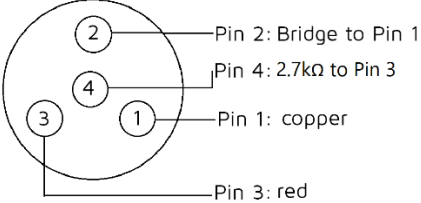
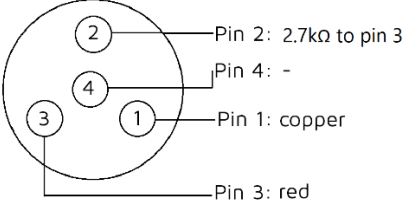
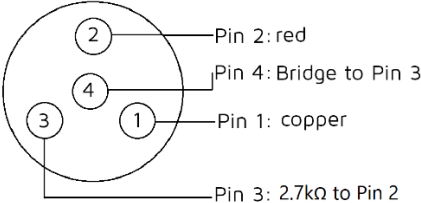
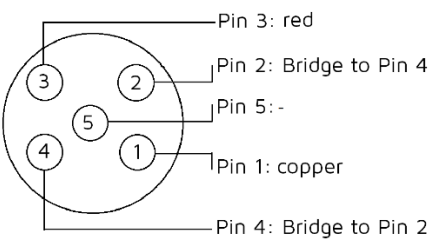

Swiss precision for excellent audio quality




VOICE TECHNOLOGIES

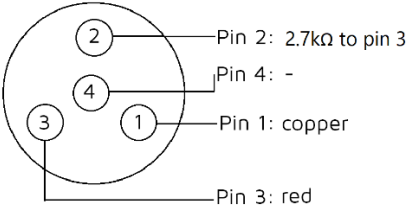
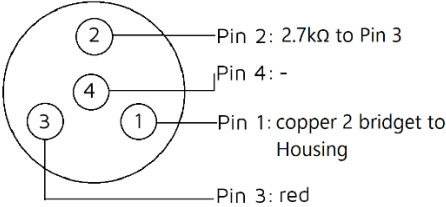
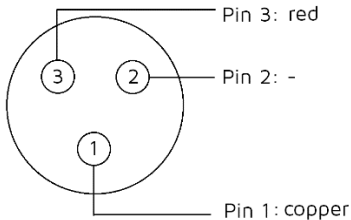

Wiring (2-wire & 3 wire)

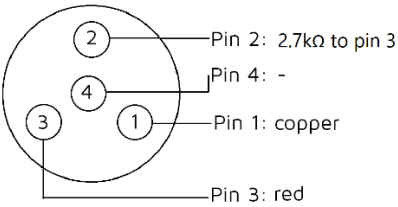
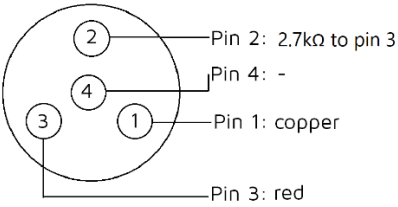
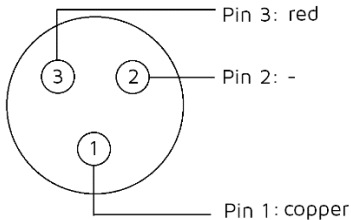
VT700MKIII

Brand	Connector	Wiring
AKG	TA3F	
AKG B-Lock	3.5 mm Mono	
Audio Limited	Lemo 3-Pin	
Audio Technica	Hirose 4-Pin	
Audio Technica	Hirose_ch 4-Pin	

Brand	Connector	Wiring
Audix	TA3F	 Pin 2: red Pin 1: copper Pin 3: 2.7kΩ to Pin 2
Beyerdynamic Opus	TA4F	 Pin 2: Bridge to Pin 1 Pin 4: 2.7kΩ to Pin 3 Pin 1: copper Pin 3: red
Beyerdynamic TG-Series	TA4F	 Pin 2: 2.7kΩ to pin 3 Pin 4: - Pin 1: copper Pin 3: red
Electro Voice	TA4F	 Pin 2: red Pin 4: Bridge to Pin 3 Pin 1: copper Pin 3: 2.7kΩ to Pin 2
Lectrosonics SM-Series	TA5F	 Pin 3: red Pin 2: Bridge to Pin 4 Pin 5: - Pin 1: copper Pin 4: Bridge to Pin 2
Lectrosonics	Lemo 3-Pin	 Pin 3: red Pin 2: - Pin 1: copper

Brand	Connector	Wiring
Lectrosonics	WPMC 2.5 mm Mono	 Tip: red Sleeve: copper
Line 6	TA4F	 Pin 2: 2.7kΩ to pin 3 Pin 4: - Pin 1: copper Pin 3: red
Mipro	TA4F	 Pin 2: Bridge to Pin 1 Pin 4: 2.7kΩ to Pin 3 Pin 1: copper Pin 3: red
Monacor	TA3F	 Pin 2: copper Pin 1: red Pin 3: 2.7kΩ to Pin 2
Rode	3.5 mm Stereo	 Tip: red Ring: - Sleeve: copper
Sennheiser Evolution & AVX	3.5 mm Stereo	 Tip: red Ring: - Sleeve: copper

Brand	Connector	Wiring
Sennheiser prof. series	Lemo 3-Pin	
Shure	TA4F	 Pin 2: 2.7kΩ to pin 3 Pin 4: - Pin 1: copper Pin 3: red
Shure digital	TA4F	 Pin 2: 2.7kΩ to Pin 3 Pin 4: - Pin 1: copper 2 bridged to Housing Pin 3: red
Shure	Lemo 3-Pin	 Pin 3: red Pin 2: - Pin 1: copper
Sony	3.5 mm Stereo	 Tip: red Ring: 2.7k to Tip Sleeve: copper
Sony	Hirose 4-Pin (old version)	

Brand	Connector	Wiring
Sony	Hirose 4-Pin (new version)	
Telex	TA4F	
Toa	TA4F	
Wiscom	Lemo 3-Pin	
Zaxcom	Lemo 3-Pin	