

AT-4012B-EB

ATTENUATOR 12 W w/Box



Designed with ergonomics of the human hand in mind, AT-4000 Series Attenuators' control knob comes in a size that provides comfortable grip and excellent control with every turn. Consisting of 8 steps attenuation, the series is built to provide precision volume control with a difference of 3dB in every step. The built-in overriding relay feature allows emergency paging which is indicated by the LED light when activated.


Key features

- Attenuators with 8 step attenuation control (+/- 3 dB)
- Ergonomic control knob with better grip for easy turn
- 24 VDC overriding relay with red LED indicator
- Terminal block for thicker diameter cable
- Clip-on face plate
- 12 W


Specifications

Input Capacity	12W
Attenuation	8 Steps (0dB, -3dB, -9dB, -12dB, -15dB, -18dB, OFF)
Override Indicator	Red LED (4-wire connection only)
Override Voltage	24V, 11mA DC (4-wire connection only)
Cable Requirements	Cable range 22 - 14 AWG
Terminal	Screw type x 5
Finish	Knob, Cover Panel: ABS Resin, White (RAL 9016 or equivalent) Front Panel (Plate): Surface treated steel plate
Dimensions	86(W) x 86(H) x 24(D) mm
Weight	0.12kg


Dimensions

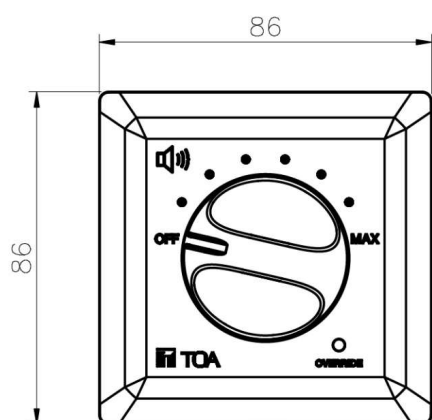

Front View

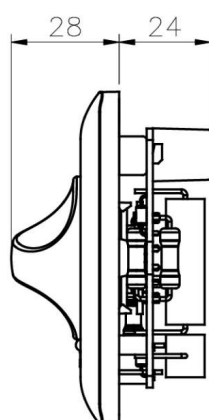


Side View

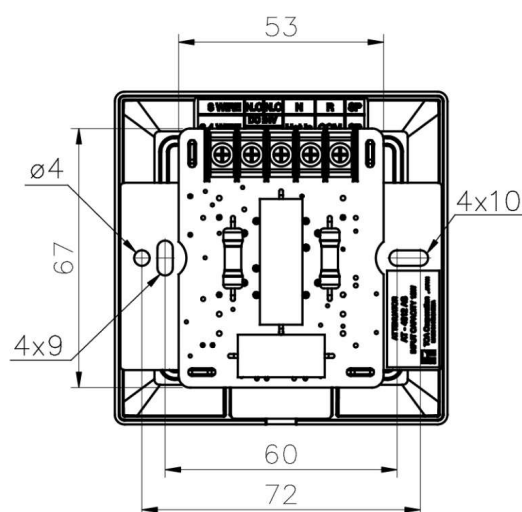


Rear View

From Output Amplifier




2 - WIRE CONNECTION

From Output Amplifier



3 - WIRE CONNECTION

From Output Amplifier



4 - WIRE CONNECTION

Note : N.C is NOT CONNECTED

UNIT : mm SCALE : 1/2