

BS-1120W

UNIVERSAL SPEAKER



The BS-1120W Speaker is specifically designed to reproduce clear announcements. The speaker also features a wide horizontal directivity owing to the vertical arrangement of speaker units, distributing announcements to a wider area. A built-in tweeter centered in the speaker smoothes sound reproduction up to high frequencies.





Key features

- Wooden enclosure
- Indoor use
- Robust construction and impact resistance
- Wide horizontal and narrow vertical dispersion angle
- High and low impedance

Specifications

Rated Input	20 W
Rated Impedance	100 V line: 500 Ω (20 W), 1 k Ω (10 W) 70 V line: 250 Ω (20 W), 500 Ω (10 W) 8 Ω (20 W)
Sound Pressure Level	95 dB (1 W, 1 m)
Frequency Response	150 - 20,000 Hz
Speaker Component	12 cm cone-type x 4 + balanced dome-type x 1
Cable Requirements	600 V vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: $\varnothing$ 0.8 - $\varnothing$ 1.2 mm 7-core twisted copper wire: 0.75 - 1.25 mm ²
Connection	Push-in connector (Bridging connections possible)
Operating Temperature	-10# to +50#
Finish	Enclosure: Plywood vinyl coating, white (RAL9010 PURE WHITE) Front: ABS resin, white (RAL9010 PURE WHITE), paint Rear: Steel plate, white (RAL9010 PURE WHITE), paint
Dimensions	180 (W) x 720 (H) x 100 (D) mm
Weight	5.1 kg (unit only)
Included Accessories	Mounting bracket...2
Optional Accessories	Applicable bracket: YS-301

Dimensions

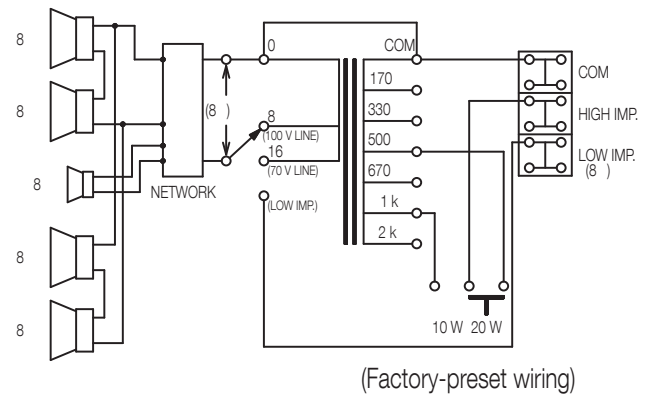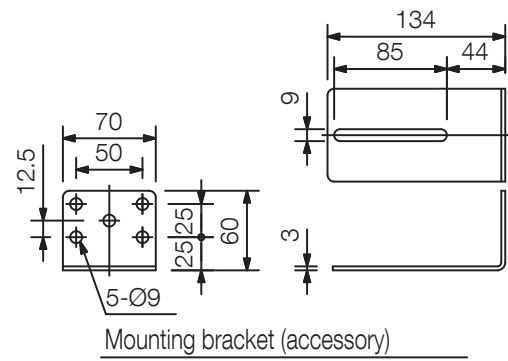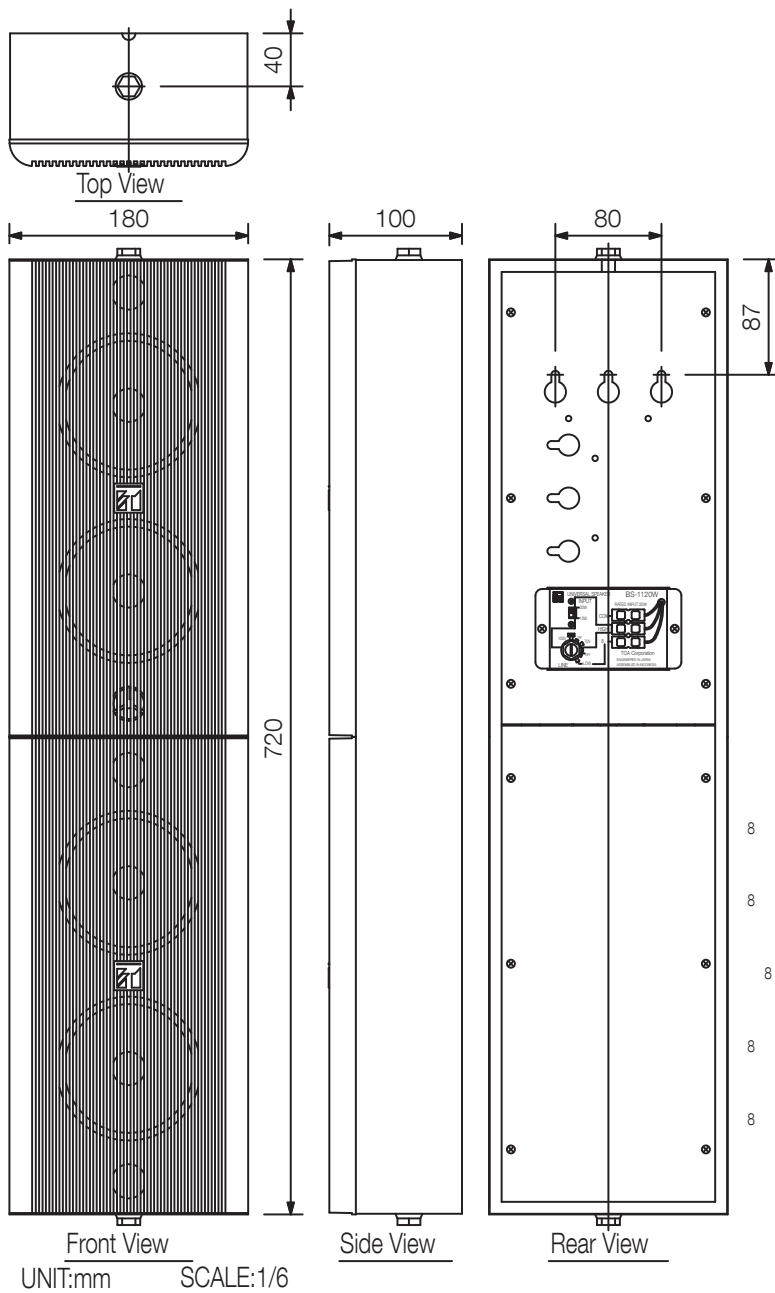

Wiring Diagram