

Included parts:

2pcs Side plates
2pcs Thin plates
2pcs Thick plates
1pcs Mount plate
1pcs Front plate
2pcs M5x8mm Screw
4pcs M4 Nylon Nut

Note!


No included screws for mounting bracket to wall / ceiling.

Material: Powder coated Aluminum for side and front plates

Material: Powder coated Steel back plate

Step 1:


Mount parts with 4 included nuts. (9) is thin plate, (8) is thick plate, (4) is mount plate.

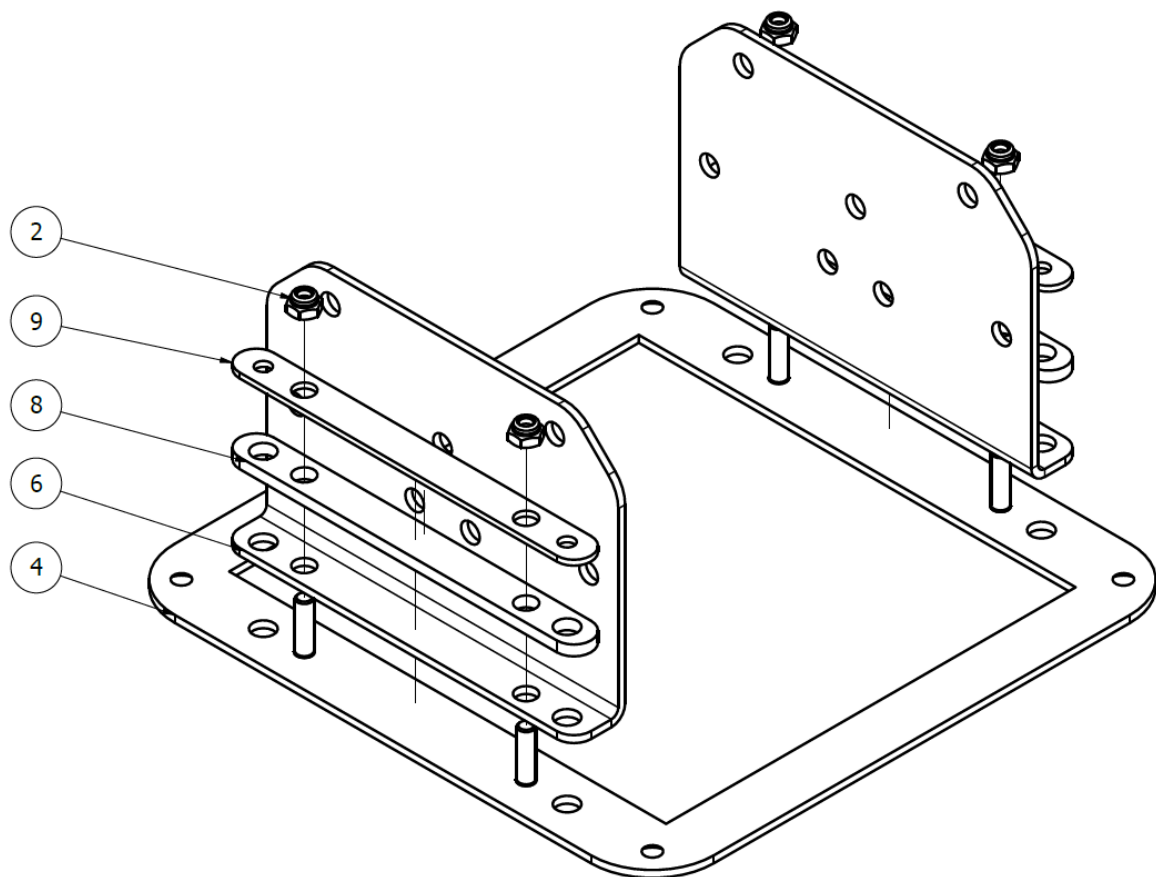

Step 2:

Mount the plate on the back of X4i.

Use screws on X4i for this purpose.

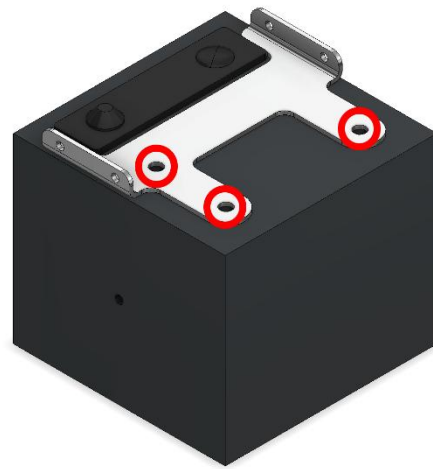


Step 3:

Select angle which X4i shall sit at:

0 Degree

Use screw from X4i to mount

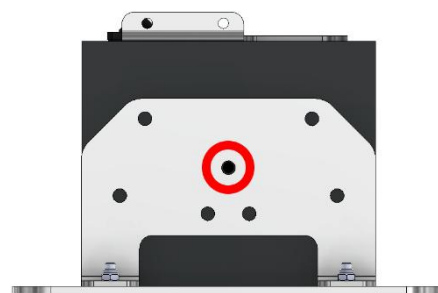


20 Degree

Use screw from X4i to mount

Note! You must flip the front grill 180 degree.

4 tiny screws on side of X4i for rotating grill.

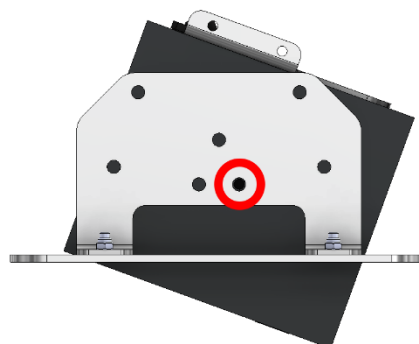


35 Degree

Use M5 threaded screw for mounting

Note! You must flip the front grill 180 degree
4 tiny screws on side of X4i for rotating grill.


Note! If mounting cutout is deeper than 20mm
Cutout must be cut so backside of speaker fits.

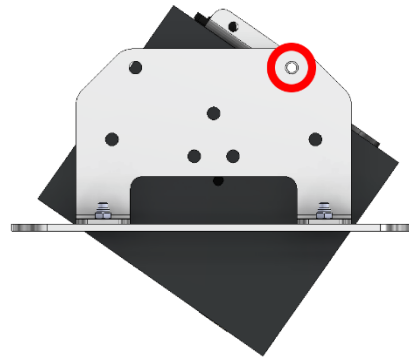

60 Degree

Use M5 threaded screw for mounting


Note! You must flip the front grill 180 degree
4 tiny screws on side of X4i for rotating grill.

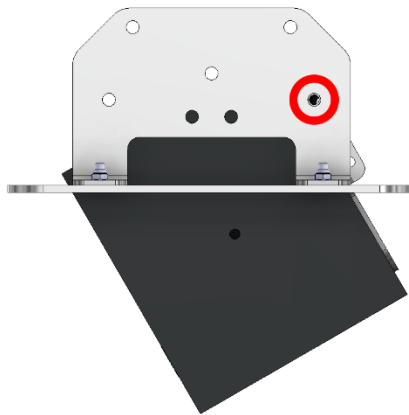

Mount front plate by putting on the front.


To remove front plate, pull firmly out from the wall or bracket.

A Flathead screw handle could help take the front plate of.

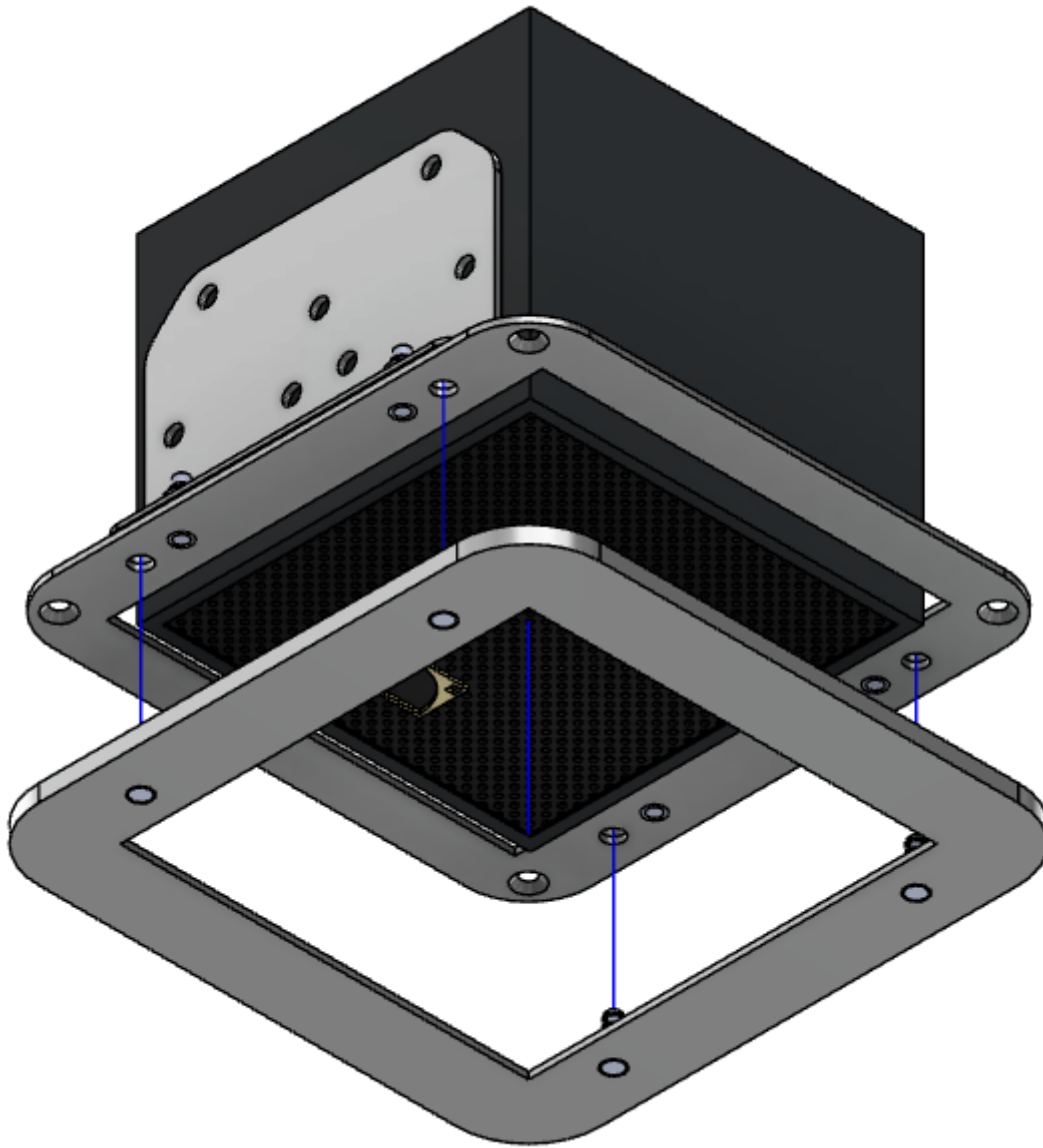

Step 4:

Cut a hole with dimensions in image below. (To Scale with A4 Printout)

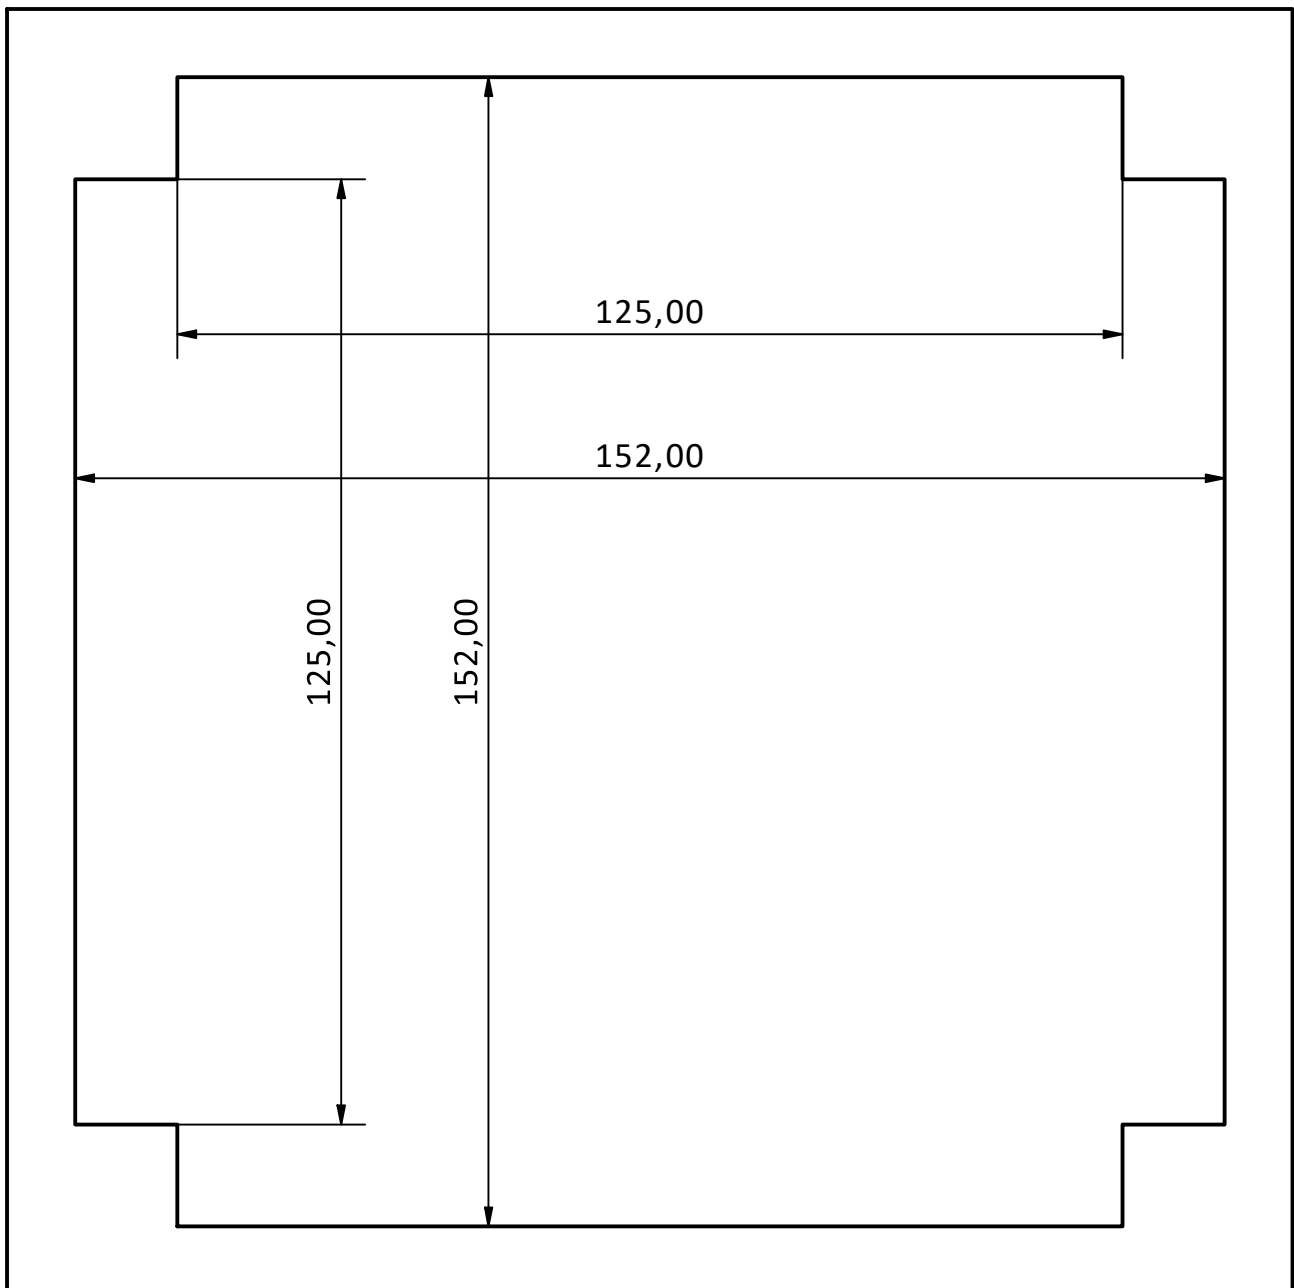

Cutout SC-IC-X4i-F